




PCRL80 & PCRL80F

Premium Choice Recessed Vent Light


Specifications

- HVI certified performance, 80 CFM @ .1" SP
- Very quiet, rated at .9 sones
- 120V/60HZ
- Galvanized housing with black polyester powder coat finish
- Universal 4 or 5" metal duct adaptor
- 14-24" adjustable hanging bars
- Fits 2x8 construction
- PCRL80 has a E26 bulb base (bulb sold separately)
- PCRL80F has a GU24 bulb base (CFL Spiral bulb included)
- Plug-&-Play compatible with PCSC (Speed Control) and PCHS (Humidity Sensor)
- 5-year warranty

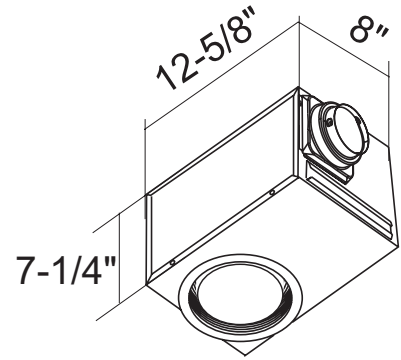

Performance

| CFM @ .1" SP | CFM @ .25" SP | Watts | Duct Dia | Sones @ .1" SP | Amps |
|-----------------|------------------|-------|----------|-------------------|------|
| 80 | 63 | 28 | 4 & 5" | 0.9 | .27 |

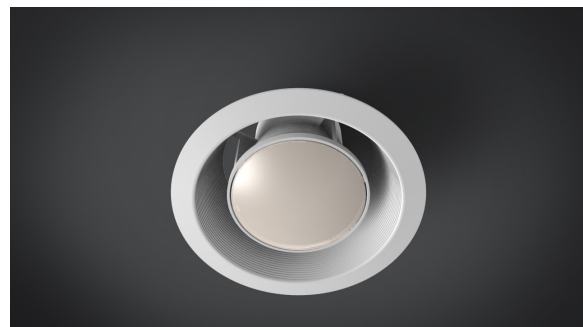

PCRL80LC Light Cover comes standard with PCRL80F and is optional with PCRL80