



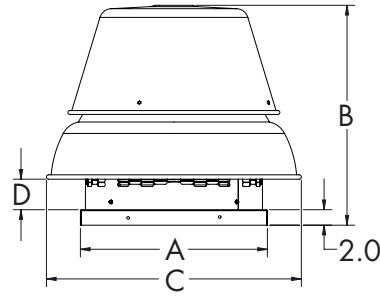

MODEL SDBD DIRECT DRIVE CENTRIFUGAL DOWNBLAST ROOF FANS

SDBD Sizes 6, 7, 8, & 10

SDBD Sizes 12, 14, 15, & 16

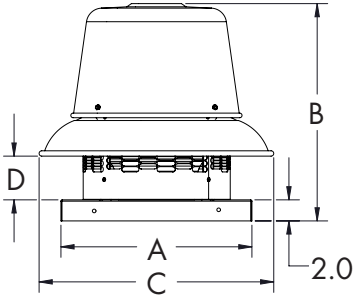

STANDARD FEATURES

- Exhaust air up to 4,980 CFM in high static pressure applications up to 1-3/4" w.g.
- Attractive spun aluminum exterior
- Direct drive units have low sound levels and quiet operation
- Curved non-overloading backward inclined wheel for efficiency at higher static pressures
- AMCA Air and Sound Licensed
- cULus 705 Listed

SDBDe FEATURES

- Centrifugal downblast roof fans with EC motors
- Ecowatt®



Ecowatt®

Size	A	B	C	D	Roof Opening	Curb O.D.	Damper O.D.	Average Ship Wt. Lbs.
6	18	14 1/8	22 5/16	1 1/2	13 1/2	16 1/2	12	109
7	18	16 13/16	22 5/16	4 1/8	13 1/2	16 1/2	12	109
8	18	20 1/2	22 5/16	4 1/8	13 1/2	16 1/2	12	109
10	18	20 1/2	22 5/16	5 1/8	13 1/2	16 1/2	12	109
12	20	27 5/16	27 5/8	3 7/8	15 1/2	18 1/2	14	122
14	20	27 5/16	27 5/8	3 7/8	15 1/2	18 1/2	14	126
15	24	28	32 7/8	4	19 1/2	22 1/2	18	140
16	24	28	32 7/8	4	19 1/2	22 1/2	18	140

FAN SPECIFICATIONS									MOTOR SPECIFICATIONS				
Line	Qty.	Model No.	Tag	CFM	SP	Fan RPM	BHP	Sones	HP	Volts	Phase	Hertz	Encl
1													
2													
3													
4													
5													

ACCESSORY ITEMS					1	2	3	4	5	ACCESSORY ITEMS					1	2	3	4	5
<input type="checkbox"/>										<input type="checkbox"/>									
<input type="checkbox"/>										<input type="checkbox"/>									
<input type="checkbox"/>										<input type="checkbox"/>									
<input type="checkbox"/>										<input type="checkbox"/>									
<input type="checkbox"/>										<input type="checkbox"/>									

Subject to change unless approved in submittal by S&P
SDBD-Submittal_v.3-0818

