

P: 800.961.7370
www.solerpalau-usa.com

SRT-30 Rotary Spring Wound Timer

Ratings

Resistive: 20 Amp, 125 VAC, 50/60 Hz
10 Amp, 250 VAC, 50/60 Hz
10 Amp, 277 VAC, 50/60 Hz

Tungsten: 7 Amp, 125 VAC

Motor: 1 HP, 120 VAC, 50/60 Hz
2 HP, 240 VAC, 50/60 Hz


Operating Temp: -40°F to 104°F

Style: Can be used with decorator & toggle type switch plates

Dimensions: 2.79" H x 1.6" W x 1.19" D

Time Cycle: 30 Minutes

Color: White

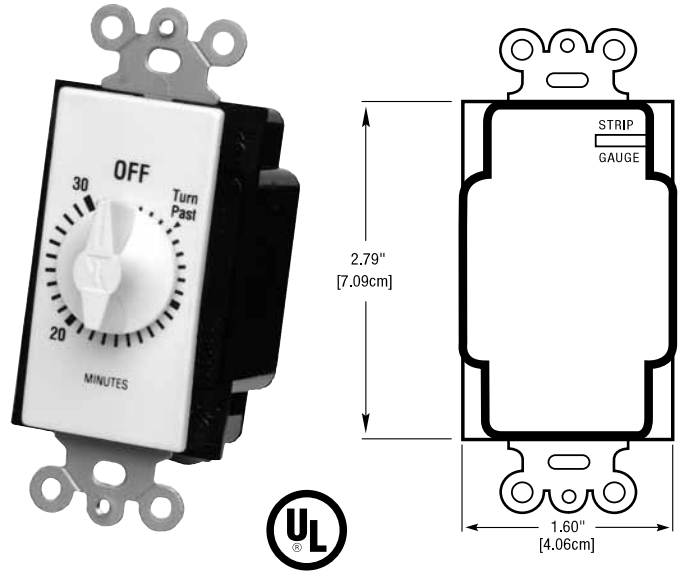

Auto-Off Timers are designed to replace any standard wall switch - single or multi-gang. This series of energy-efficient mechanical timers do not require electricity to operate. In addition, they automatically limit the ON times for fans.

Features

- Hold feature enables user to override the automatic shut-off function
 - Single or multi-gang with no field modification required
 - Time saving up front terminal connection with teeter-type terminals
 - Press-on knob design ensures quick and easy installation
 - CFL Compatible
- Not for use with sunlamps, saunas, or loads that could cause personal injury if timed incorrectly.*

ACCESSORY MODEL	1	2	3	4	5	REMARKS

Project: _____	Submitted: _____
Customer: _____	Approved: _____
Location: _____	

For more information contact us at www.solerpalau-usa.com or 1.800.961.7370 for additional submittal drawings.

S&P will not be responsible for fabrication changes or errors resulting from customer use of a non-current submittal drawing.

