



P: 800.961.7370
www.solerpalau-usa.com

AUTO EXHAUST DAMPER MODEL 611

FEATURES

Frame

- Frame is Galvanized Steel.
- Conduit knockout provided for ease of electrical hook up.
- Easy to motorize. (order 411611 motor pack)
- 2" deep frame.

Blades



- Blades are 26 gauge Mill Finish Aluminum with galvanized reinforcement strip.
- Blades open freely to allow full opening and closing.
- Felt seal on leading edge of blades for quiet closing and better protection from the weather.
- Nylon bushings and stainless steel pivot pins
- Tie rod attached to all blades for simultaneous opening.

Ratings

- Maximum recommended velocity is 2250 FPM
- Pressure- 1.0 in w.g - differential pressure
- Temperature -40°F to 180°F

Options

- Motor packs.

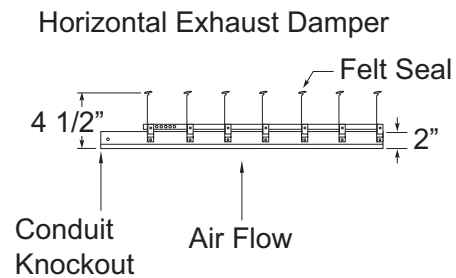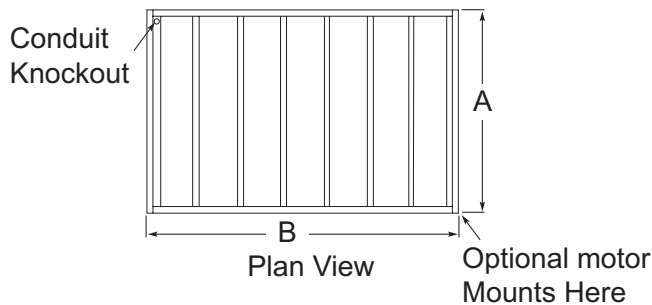

Dimensions in Inches

Part No.	Overall Frame Dimensions (W x H)	Free Area Dimensions (W x H)	Face Area (Sq. Ft.)	Est. Free Area (Sq. Ft.)	Number of Panels	Est. Shipping Weight (lbs)
611034	33.75 x 33.75	31.125 x 32.25	7.91	6.97	1	15
611035	34.75 x 34.75	31.125 x 33.25	8.39	7.19	1	16
611036	35.75 x 35.75	33.125 x 34.25	8.88	7.88	1	17
611040	39.75 x 39.75	37.125 x 38.25	10.97	9.86	1	19.5
611048	47.75 x 47.75	45.125 x 46.25	15.83	14.49	1	26

Note: Dimensions are approximate due to normal tolerances in the manufacturing process. Estimated Free Area calculation is based upon the following formula: $MD[A+B+(N \times C)]/144$. Free Area x FPM = CFM; actual performance may vary.