




PCD110M & PCD110H - Premium Choice with DC Motor

(Ceiling Mounted Ventilation Fans)

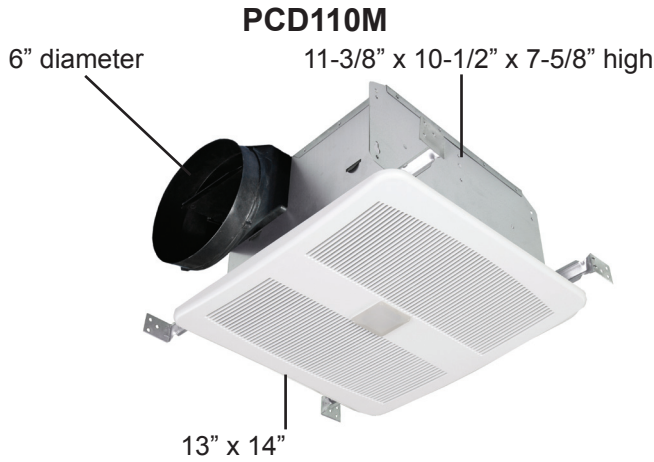

Performance & Dimensions

| | | | | | |
|------------------------------------|---------|----------------------------|------|------|------|
| CFM @ 0.1" SP | 4" Duct | 80 | 90 | 110 | 120 |
| | 6" Duct | 90 | 110 | 120 | 140 |
| CFM @ 0.25" SP | 4" Duct | 50 | 63 | 77 | 87 |
| | 6" Duct | 64 | 77 | 89 | 100 |
| Sones @ 0.1" SP | 4" Duct | 0.7 | 0.7 | 1.0 | 1.2 |
| | 6" Duct | 0.3 | 0.5 | 0.8 | 1.1 |
| Watts @ 0.1" SP | 4" Duct | 5.5 | 7 | 11.5 | 13 |
| | 6" Duct | 5.5 | 10 | 11.5 | 14.5 |
| Energy Efficiency (CFM/Watt) | 4" Duct | 14.5 | 12.9 | 9.6 | 9.2 |
| | 6" Duct | 16.4 | 11 | 10.4 | 9.7 |
| Amps | | .16 | .18 | .22 | .23 |
| ENERGY STAR Qualified | | Yes | | | |
| Duct Connector Diameter (in) | | 4" or 6" | | | |
| Grille Size (in) | | 13" x 14" | | | |
| Dimensions (w x d x h) (in) | | 11-3/8" x 10-1/2" x 7-5/8" | | | |



* Energy Star qualified data based on tested air flow and power consumption.

Typical Specifications:

Ventilating fan shall be S&P PCD110M mounted in the ceiling with a built-in motion sensor and speed delay timer or a PCD110H with a built-in humidity sensor. The DC motor shall have a 6 year warranty, and the fan shall have a 5 year limited warranty. The fan shall be HVI Certified at 0.1 inch water gauge for CFM performance above. The motor shall be ETL and cETL Listed with impedance protection plus additional thermal protection. The fan shall be ENERGY STAR® Qualified.

For more information contact us at www.solerpalau-usa.com or 1.800.961.7370 for additional submittal drawings. Soler & Palau will not be responsible for fabrication changes or errors resulting from customer use of a non-current submittal drawing.