



PCLP80, 100

Low Profile Premium Choice

(Low Profile Ceiling or Wall Mounted Ventilation Fans)




Performance

| Model | CFM | Static Pressure (in W.G.) | Watts | Power (V/Hz) | Sones @ 0.1" SP | AMPs |
|---------|--------|---------------------------|-------|--------------|-----------------|------|
| PCLP80 | 80/62 | 0.1/0.25 | 25 | 120/60 | 1.2 | .35 |
| PCLP100 | 100/80 | 0.1/0.25 | 25 | 120/60 | 2.0 | .4 |


Dimensions

| Model | Duct Dia. (oval) | Grille Size (Sq. in inches) | Cabinet Size (in Inches) | | | Unit Wgt. (lbs) |
|---------|------------------|-----------------------------|--------------------------|--------|-------|-----------------|
| | | | W | D | H | |
| PCLP80 | 4" | 13 x 14 | 10-1/4 | 10-1/4 | 3-3/4 | 7 |
| PCLP100 | 4" | 13 x 14 | 10-1/4 | 10-1/4 | 3-3/4 | 7 |

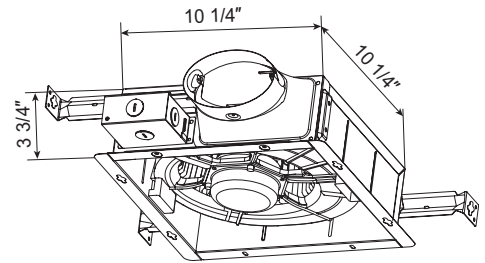

Options & Accessories

- Contractor Packs (4-packs) for PCLP80
- Humidity Sensor, Plug-&-Play module
- Speed Control, Plug-&-Play module
- Lighted Grille (LED)

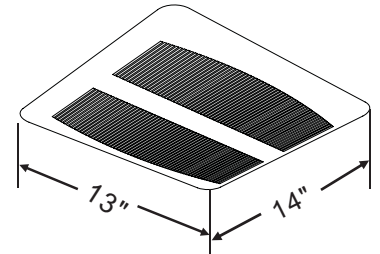

Typical Specifications:

Ventilating fan shall be S&P PCLP80 or PCLP100 low profile fan suitable for ceiling or wall mounting. The fan shall have a 5-year limited warranty. The fan shall be HVI Certified at 0.1 inch water gauge for CFM performance above. The motor shall be ETL and cETL Listed with impedance protection plus additional thermal protection. The fan shall be ENERGY STAR® Qualified.